

Model

150 / 165 kVA, diesel

C165



We value the high
quality of our
products


Soundproof canopy with lockable doors, Cummins engine, Stamford alternator, ComAp IntelliLite 4 AMF25 controller, four industrial sockets directly on the unit and a fuel tank in the base frame.

Prime: power for continuous operation. Standby: power for emergency operation.

Overall view



Engine compartment

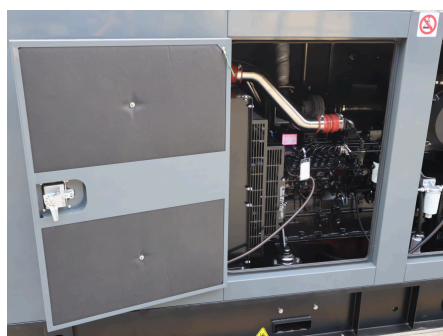

Controls and sockets



Photos are illustrative. Technical data may change.

GENERAL PARAMETERS

Standby power (cos φ = 0.8):	kVA / kW	165 / 132
Prime power (cos φ = 0.8):	kVA / kW	150 / 120
Rated current:	A	217
Rated voltage (line-to-line), phases:	V	400 / 3
Frequency:	Hz	50
Sound level at 7 m (max.):	dB	73

PHYSICAL PARAMETERS OF THE GENSET

Fuel:		diesel
Fuel consumption at 100 % prime power:	l/h	34
Fuel tank capacity:	l	275
Running time at 100 % prime load (approx.):	h	8.1
Genset dimensions (L × W × H):	mm	3300 × 1130 × 1650
Net weight of the genset:	kg	1830

ENGINE

Cummins 6BTAA5.9-G12

Design:		4-stroke, water-cooled, in-line
Injection system:		direct injection
Aspiration:		turbo + charge air cooling
Number of cylinders:		6
Displacement:	l	5.9
Bore × stroke:	mm	102 × 120
Compression ratio:		17.3 : 1
Rated speed:	rpm	1500
Idle speed:	rpm	750-850
Speed governor:		electronic
Injection order:		1-5-3-6-2-4
Electrical system, starter:	V DC	24
Max. exhaust back pressure:	kPa	13
Exhaust pipe diameter:	mm	75

ALTERNATOR

Stamford UCI274F

Design:		brushless, self-excited
Bearings / leads:		1 / 12
Winding insulation class:		H
Protection grade:		IP23
Voltage regulation accuracy:	%	± 0.5
Power factor:		0.8

Model

150 / 165 kVA, diesel

C165

Construction

Soundproof canopy on a steel base frame with integrated fuel tank and forklift openings

Control panel

ComAp IntelliLite 4 AMF25



STANDARD EQUIPMENT

- Soundproof canopy, lockable doors
- Cummins engine 6BTAA5.9-G12
- Stamford alternator, IP23, insulation class H
- Radiator (belt-driven fans)
- 24 V charging alternator
- ComAp IntelliLite 4 AMF25 controller
- Main circuit breaker CHINT 250 A with residual-current protection
- Four industrial sockets (L1-L4)
- Emergency stop button
- Air, fuel and oil filter
- Two batteries (24 V system) with rack and cables
- Exhaust system with flexible joint, silencer, flange
- Base frame with fuel tank, user manual

OPERATING PARAMETERS

Fuel consumption at 110 % (standby power):	l/h	38
Fuel consumption at 100 % prime power:	l/h	34
Fuel consumption at 75 % prime power:	l/h	26
Fuel consumption at 50 % prime power:	l/h	17
Fuel consumption at 25 % prime power:	l/h	10
Engine oil capacity:	l	16.4
Coolant capacity (engine only):	l	10
Oil pressure, idle / rated speed:	kPa	207 / 345
Max. oil temperature:	°C	121
Max. coolant temperature (standby / prime):	°C	104 / 100

COMAP INTELILITE 4 AMF25 CONTROLLER

- 7-digit display, built-in governor and AVR control
- Generator power monitoring (kW, kVA)
- Overload protection (kW, kVAr)
- Mains de-coupling protection
- Base load function (kW export)
- Emergency stop, start failure monitoring

Fuel consumption values apply to prime (continuous) power; running time is an estimate.